


## PLANK SPECIFICATION SHEET

### Classic Oak RVS - 14029

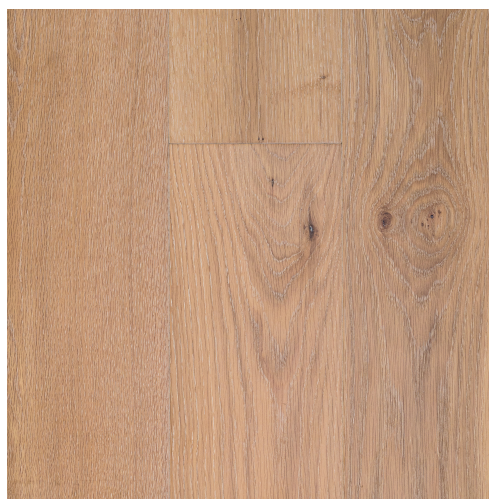


Classic Oak

### Product Profile

<b>Collection</b>	14mm Premium Oak
<b>Wood Species</b>	European Oak
<b>Surface Finish</b>	UV Lacquer
<b>Bevel</b>	4 sided Micro- Bevel
<b>Wear Layer</b>	Solid European Oak
<b>Core</b>	Hardwood Multi-layer plywood
<b>Joining Profile</b>	Tongue and Groove
<b>Nested Boards</b>	Up to 20%
<b>Wood Grade</b>	ABCD, AB(on pre order only)
<b>Available Sizes:</b>	1900*190*14/2mm

### Plank Profile

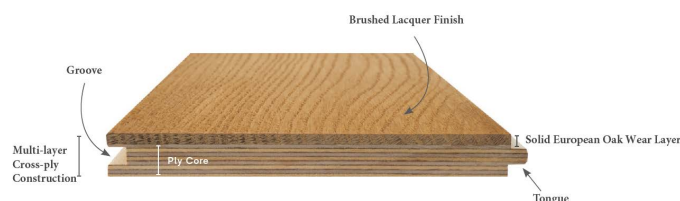

### Installation

<b>Installation Method</b>	Floating, Direct Stick
<b>Suitable Substrates</b>	Particle Board, Concrete, existing timber - enquire for others
<b>Suitable Applications</b>	Flooring, Walls, Ceilings
<b>Suitable Uses</b>	Residential homes, hospitality, retail stores, restaurants, apartments
<b>Underfloor Heating</b>	Hydronic Systems - enquire for others

### Technical Specification

<b>14mm Mean CHF Value (kW/m2)</b>	3.7
<b>14mm Mean Smoke Value (%.min)</b>	40
<b>Formaldehyde Emission</b>	E1
<b>Slip Classification</b>	P3
<b>Moisture Content</b>	8-12%
<b>Smoke Value</b>	64 %/min
<b>Floating</b>	Yes
<b>Direct Stick</b>	Yes