

PLANK SPECIFICATION SHEET

Natural Limed HB - UR - 1002




Natural Limed

Product Profile

| | |
|-------------------------|--|
| Collection | Herringbone |
| Wood Species | European Oak |
| Surface Finish | UV Lacquer |
| Bevel | 4 sided Micro- Bevel |
| Wear Layer | Solid European Oak Hardwood |
| Core | Multi-layer plywood |
| Joining Profile | Tongue and Groove |
| Nested Boards | Up to 20% |
| Wood Grade | ABCD, AB(on pre-order only) |
| Available Sizes: | 1900 x 190 x 15/3 mm 2200 x 220 x 20/6 mm 600 x 120 x 15/3 mm (Herringbone) 770 x 125 x 15/3 mm (Chevron) |

Plank Profile

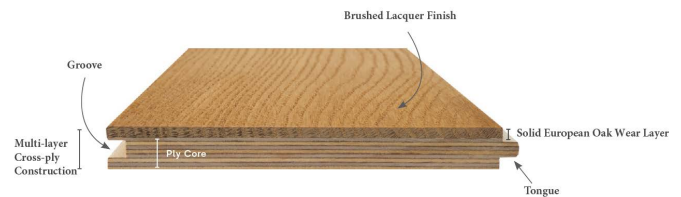

Installation

| | |
|------------------------------|--|
| Installation Method | Floating, Direct Stick |
| Suitable Substrates | Particle Board, Concrete, existing timber - enquire for others |
| Suitable Applications | Flooring, Walls, Ceilings |
| Suitable Uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor Heating | Hydronic Systems - enquire for others |

Technical Specification

| | |
|--------------------------------------|----------|
| 15mm Mean CHF Value (kW/m2) | 3.7 |
| 15mm Mean Smoke Value (%.min) | 40 |
| Formaldehyde Emission | E1 |
| Slip Classification | P3 |
| Moisture Content | 8-12% |
| Smoke Value | 64 %/min |
| Floating | Yes |
| Direct Stick | Yes |