

PLANK SPECIFICATION SHEET

Natural Limed UR - 1002




Natural Limed

Product Profile

Collection	15mm&20mm Premium Oak
Wood Species	European Oak
Surface Finish	UV Lacquer
Bevel	4 sided Micro- Bevel
Wear Layer	Solid European Oak Hardwood
Core	Multi-layer plywood
Joining Profile	Tongue and Groove
Nested Boards	Up to 20%
Wood Grade	ABCD, AB(on pre-order only)
Available Sizes:	1900 x 190 x 15/3 mm 2200 x 220 x 20/6 mm 600 x 120 x 15/3 mm (Herringbone) 770 x 125 x 15/3 mm (Chevron)

Plank Profile

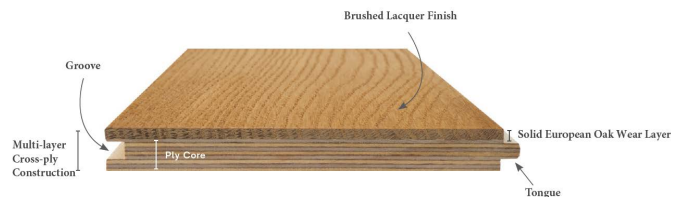

Installation

Installation Method	Floating, Direct Stick
Suitable Substrates	Particle Board, Concrete, existing timber - enquire for others
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	Hydronic Systems - enquire for others

Technical Specification

15mm Mean CHF Value (kW/m2)	3.7
15mm Mean Smoke Value (%.min)	40
Formaldehyde Emission	E1
Slip Classification	P3
Moisture Content	8-12%
Smoke Value	64 %/min
Floating	Yes
Direct Stick	Yes