

## PLANK SPECIFICATION SHEET

**Natural Oak HB - UR - 1104**




Natural Oak

### Product Profile

|                         |  |
|-------------------------|--|
| <b>Collection</b>       | Herringbone  |
| <b>Wood Species</b>     | European Oak   |
| <b>Surface Finish</b>   | UV Lacquer   |
| <b>Bevel</b>            | 4 sided Micro- Bevel   |
| <b>Wear Layer</b>       | Solid European Oak Hardwood  |
| <b>Core</b>             | Multi-layer plywood  |
| <b>Joining Profile</b>  | Tongue and Groove  |
| <b>Nested Boards</b>    | Up to 20%  |
| <b>Wood Grade</b>       | ABCD, AB(on pre-order only)  |
| <b>Available Sizes:</b> | 1900 x 190 x 15/3 mm<br>2200 x 220 x 20/6 mm<br>600 x 120 x 15/3 mm (Herringbone)<br>770 x 125 x 15/3 mm (Chevron) |

### Plank Profile

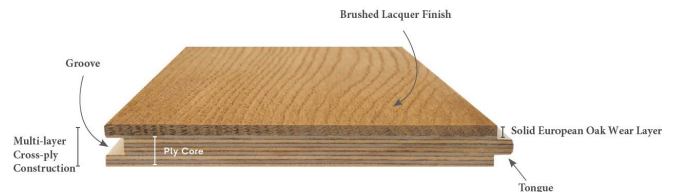

### Installation

|                              |  |
|------------------------------|--|
| <b>Installation Method</b>   | Floating, Direct Stick   |
| <b>Suitable Substrates</b>   | Particle Board, Concrete, existing timber - enquire for others         |
| <b>Suitable Applications</b> | Flooring, Walls, Ceilings  |
| <b>Suitable Uses</b>         | Residential homes, hospitality, retail stores, restaurants, apartments |
| <b>Underfloor Heating</b>    | Hydronic Systems - enquire for others                                  |

### Technical Specification

|                                      |          |
|--------------------------------------|----------|
| <b>15mm Mean CHF Value (kW/m2)</b>   | 3.7      |
| <b>15mm Mean Smoke Value (%.min)</b> | 40       |
| <b>Formaldehyde Emission</b>         | E1       |
| <b>Slip Classification</b>           | P3       |
| <b>Moisture Content</b>              | 8-12%    |
| <b>Smoke Value</b>                   | 64 %/min |
| <b>Floating</b>                      | Yes      |
| <b>Direct Stick</b>                  | Yes      |